




ENGAGE CABLE & ACCESSORIES

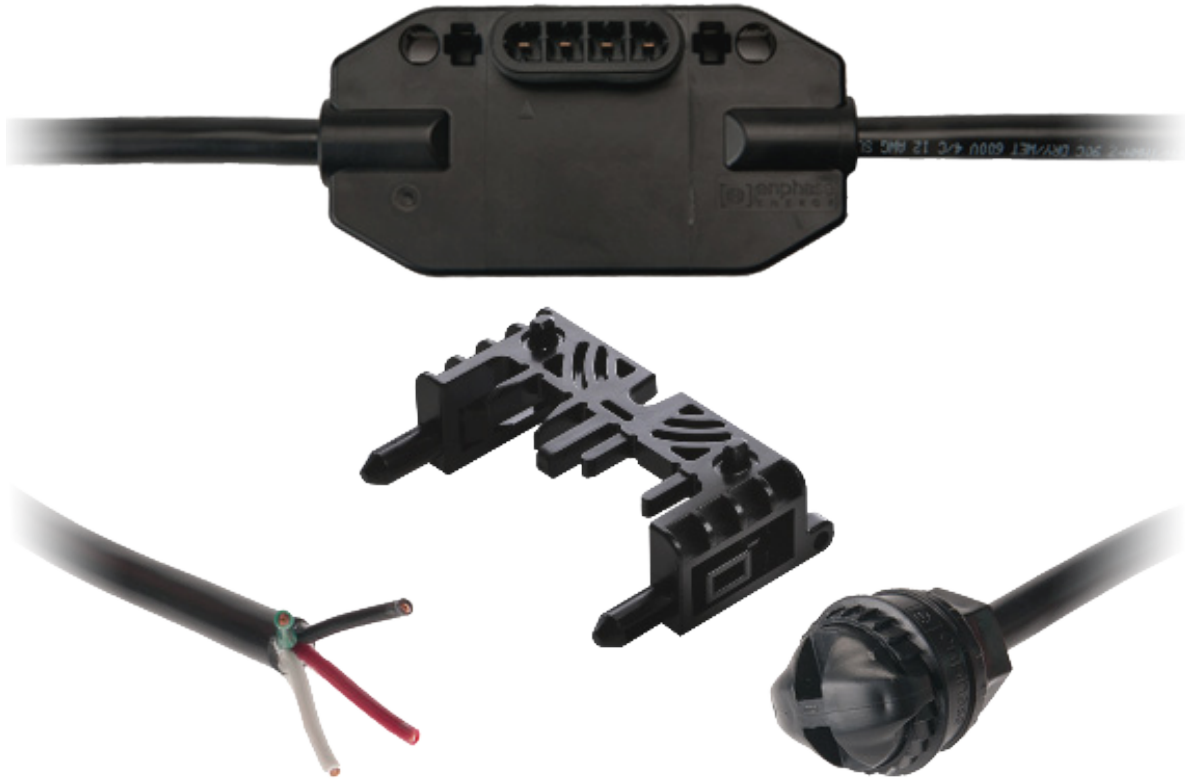

The Engage Cable is a continuous length of 12AWG cable with pre-installed connectors for Enphase Microinverters to plug into. The cable is handled like standard outdoor-rated electrical wire, allowing it to be cut, spliced and extended as needed.

The Engage Accessories complement the Engage Cable and give it the ability to adapt to any installation.

FAST [- Quick installation
- Large branch capacity


FLEXIBLE [- Simple design
- No additional cables

SAFE [- No high voltage DC
- Reduced fire risk

CABLING ACCESSORIES - DETAILS and SPECIFICATIONS

Cable Types

Voltage	Connector Spacing	PV module orientation
240VAC, 4 conductors	1.025 meter (40")	Portrait
240VAC, 4 conductors	1.7 meter (67")	Landscape
208VAC, 5 conductors	1.025 meter (40")	Portrait
208VAC, 5 conductors	1.7 meter (67") connector spacing	Landscape



Cable Specifications

Cable Length Options


Description	Rating	Model Number	# Connectors	Approx weight
Cable temperature rating	90°C (194°F) wet/dry	ET10-240-40	40 Connectors	@40 lbs
Cable insulator rating	THWN-2	ET17-240-40	40 Connectors	@45 lbs
UV exposure rating	UL 746 C, F1	ET10-208-30	30 Connectors	@30 lbs
Conductor gauge	12AWG	ET17-208-30	30 Connectors	@35 lbs

Engage Accessories




Branch Terminator

One terminator needed per branch circuit
ET-TERM-10 (quantity 10)




Disconnect tool

Plan to use at least one per installation
ET-DISC-05 (quantity 5)



Watertight sealing cap

One needed to cover each unused connector on the cabling.
ET-SEAL-10 (quantity 10)



Cable clip

Many needed to fasten cabling to the racking or to secure looped cabling.
ET-CLIP-100 (quantity 100)

Available From:

SolarPanelStore.com

Enphase Energy, Inc.
201 1st Street, Petaluma, CA 94952
877-797-4743 enphase.com

142-000XX Rev 0X