

Sunny Boy 700U



The leading grid-tied photovoltaic inverters in Europe and America

UL 1741 Listed
for grid
interactive
inverters

5-year
comprehensive
warranty

Rugged NEMA
4X stainless steel
outdoor
enclosure
standard

Exceptional
reliability
and energy
capture ratio

Easy to install
three-point
mounting system

Comprehensive
communications
and data
collection
options

SMA's Modular
String inverter
design is
expandable to
virtually any
system size




LISTED
1741, 1998



Shown with optional display

The SMA Sunny Boy inverter, the most popular grid-tied photovoltaic inverter in Europe, is now UL 1741 Listed and available in North America. Sunny Boy's extensive track record in some of the world's most demanding markets has made it the favorite among PV professionals everywhere. Over 200,000 Sunny Boy inverters have been installed worldwide. Having achieved the highest reliability of any PV inverter, Sunny Boy gained immediate acceptance in the US and Canadian markets. Superior design, rock-solid German engineering, and exceptional real-world efficiency have made Sunny Boy the top choice for American solar designers. These professionals know that Sunny Boy is a grid-tied inverter that they can recommend without reservation and install with confidence.

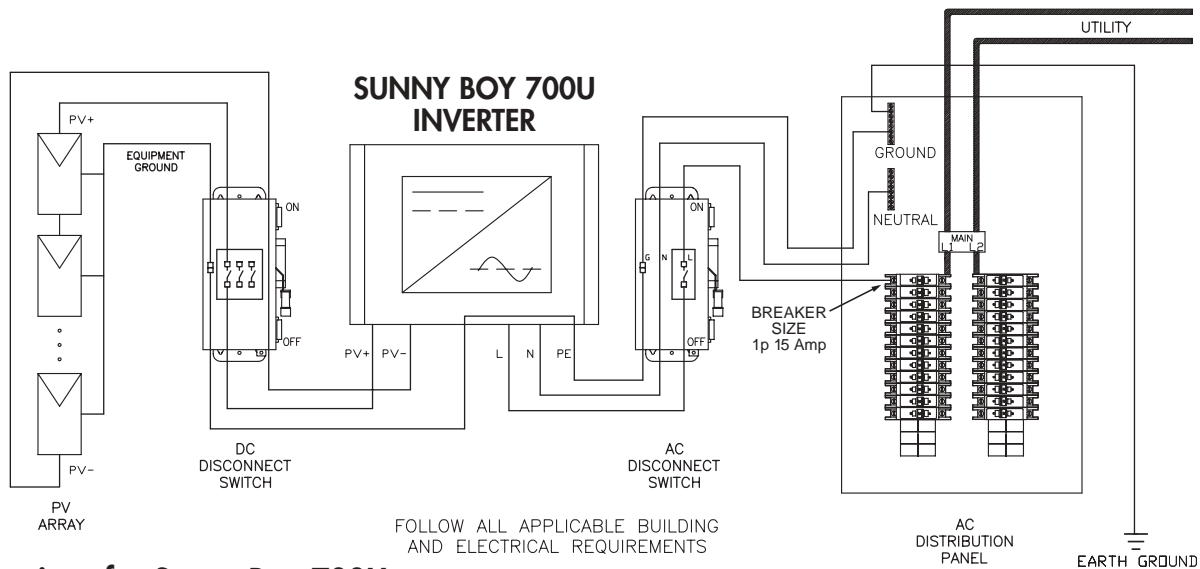

Specifications for Sunny Boy 700U

Inverter Technology	Real sine-wave, current source, high frequency PWM
AC Input Voltage	106-132 (120 V)
AC Input Frequency	59.3-60.5 (60 Hz)
Peak Power Tracking Voltage	250/200/150 V DC
Minimum DC Input Voltage	125/100/75 V DC
Maximum DC Input Voltage	250 V DC
Maximum Array Input Power (DC @ STC)	1000/840/640**
Maximum AC Power Output	700/600/460 W**
Current THD	Less than 3%
Power Factor	Unity
Peak Inverter Efficiency	93.6%/93.3%/92.4%
Cooling	Convection cooling (no fan)*
PV Start Voltage	150/125/95 V DC
Maximum AC Output Current	4.3/5.7/6.6 A
Maximum DC Input Current	7 A
DC Voltage Ripple	Less than 10%
Power Consumption	0.1 W nighttime, < 4 W standby
Ambient Temperature Rating	45 °C
Enclosure	NEMA 4X (IP65) stainless steel
Size	12.68 W x 12.60 H x 7.09 D inches (322 W x 320 H x 180 D mm)
Weight	42.87 lbs (16 kg)
Compliance	United States: UL 1741, E210376, UL 1998, IEEE 519, IEEE 929 ANSI C62.41 C1 & C3, FCC part 15 A&B

**Jumper settings adjustable

ALL SPECS MAY CHANGE WITHOUT NOTICE

Sunny Boy's unsurpassed reliability and efficiency is the result of SMA's manufacturing philosophy that combines simple design with robust execution. SMA's state-of-the-art maximum power point tracking performance results in greater real-world energy capture than any other grid-tied PV inverter. Sunny Boy's safety and reliability record is also exceptional due, in part, to the inverter's redundant grid monitoring and built-in ground fault detection and interruption protection. The inverter's IGBT power stage generates a nearly perfect sine wave with the lowest harmonic distortion in the industry and meets ultra-strict FCC EMC standards. SMA's unique String Inverter technology makes future system expansion simple. SMA advanced communication options are available to satisfy almost any application.

*Optional external fan (Sunny Breeze) available

SMA America, Inc., 12438-C Loma Rica Drive, Grass Valley, CA 95945
Phone 530-273-4895 • Fax 530-274-7271
www.SMA-AMERICA.com • email: info@SMA-AMERICA.com



**Solar Today...
Energy Tomorrow**

