

# SLP020-24

## High Efficiency Multicrystalline PV Module

Electrical Characteristics	SLP020-24
Product code	020012402
Maximum power (Pmax)	20W
Voltage at Pmax (Vmp)	34.4V
Current at Pmax (Imp)	0.58A
Open-circuit voltage (Voc)	43.2V
Short-circuit current (Isc)	0.68A
Temperature coefficient of Voc	- $(80 \pm 10)$ mV/°C
Temperature coefficient of Isc	$(0.065 \pm 0.015)$ %/°C
Temperature coefficient of power	- $(0.5 \pm 0.05)$ %/°C
NOCT (Air 20°C; Sun 0.8kW/m <sup>2</sup> wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	1000V DC
Power tolerance	+10%/- 5%

\*STC: Irradiance 1000W/m<sup>2</sup>, AM1.5 spectrum, module temperature 25°C

\*NOCT: Nominal operating cell temperature (the data is only for reference)



### Module Diagram

Dimensions in brackets are in inches.


Un-bracketed dimensions are in millimeters.

Unit: mm[in.]



### Features

- Nominal 24V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

### Characteristics

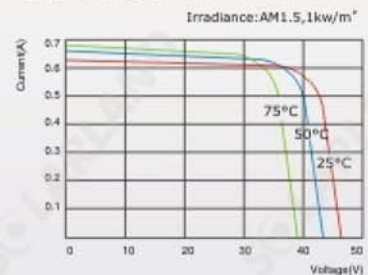

SLP020-24 I-V Curves

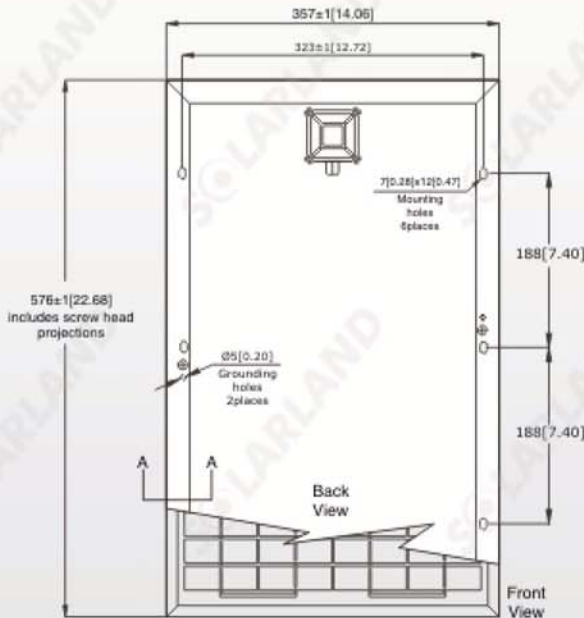

Junction Box  
Top View (Lid Open)



Section A-A

Specifications	SLP020-24
Cells	Polycrystalline silicon solar cell
No. of cells and connections	72(4X18)
Module dimension	576mm[22.68in.]x357mm[14.06in.]x30mm[1.18in.]
Weight	2.8kg[6.17lbs]
Packing information(Inner box)	585mm[23.03in.]x365mm[14.37in.]x35mm[1.38in.]
Packing information(Carton)	605mm[23.81in.]x215mm[8.46in.]x390mm[15.35in.]/(5pcs/ctn)

\*Limited warranty: 2-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output. For detail, please contact us.

\*Specifications are subject to change without notice at any time.