


⚠ Warning: Shock Hazard. Disconnect all sources of AC and DC power to the inverter or other Xanbus device to which the Gateway is being connected before accessing that product's wiring compartment. Before installing the Gateway, read the Important Safety Instructions in the Installation Guide.

1

Connect the Communications Gateway to the Xanbus and computer networks. The Gateway can be connected directly to a computer, but connecting through a standard router makes setup easier. Note: during initial setup, all connections must be wired. After communication has been established, the Gateway can be configured for wireless mode.

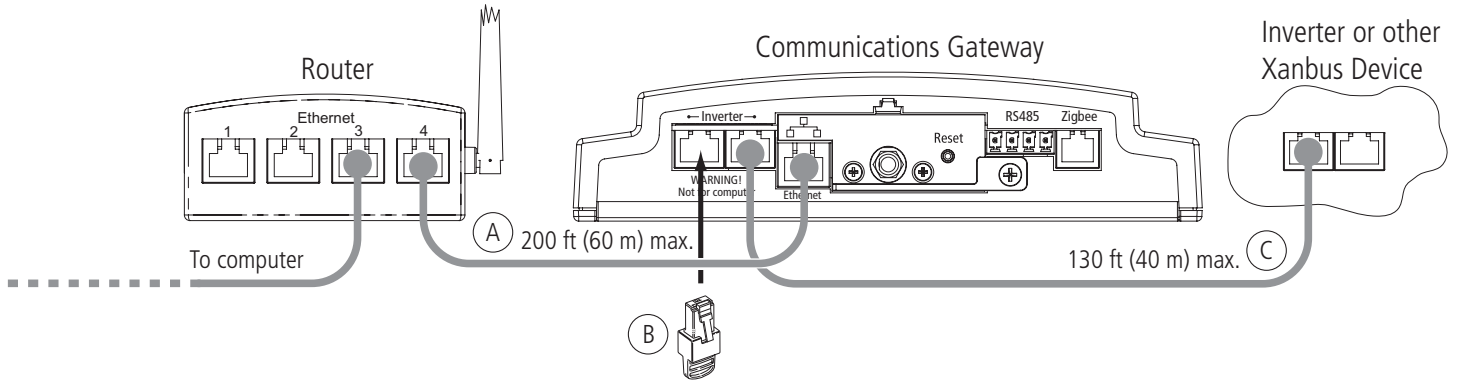


A Connect a cable from the Gateway Ethernet port to the router. Do not connect the Gateway to the WAN (Uplink or Internet) router port.

B Terminate the Gateway if it is the last Xanbus device in the chain. See the network layout diagrams in the Gateway Installation Guide.

C Connect a cable from the Gateway to the inverter or closest Xanbus device. If the inverter in the system is operating, it supplies power to the Gateway through the Xanbus network.

2

Wait one minute for the Gateway to initialize after power-up. The Inverter (green) and Modbus (yellow) LEDs should be blinking.




3

Download and install Yahoo! Widgets (also known as Konfabulator or Yahoo! Widget Engine) from the Gateway CD or <http://widgets.yahoo.com/>, then copy the Xantrex Solar Monitor Widget from the CD to the My Widgets (or Widgets) folder on your computer. The My Widgets folder is created when you install Yahoo! Widgets.


4

Start the Xantrex Solar Monitor Widget. If the Widget does not automatically detect the Gateway and request a password, see the Gateway Installation Guide for more information. **IMPORTANT:** If you are connected to a virtual private network (VPN), ensure that you disconnect the VPN before starting the Widget.

A. Enter password "x".

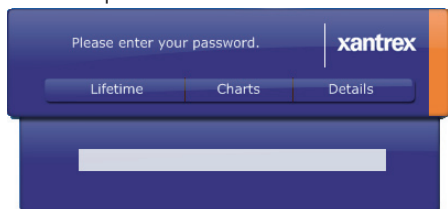


B. The main status window appears.



5

View the Gateway configuration web page by clicking Details on the Widget, then selecting Gateway from the list of devices. The configuration page opens in your browser. On the configuration page, enter user and system information (required), change your password, and configure wireless mode (optional). See the Gateway Installation Guide for more information.

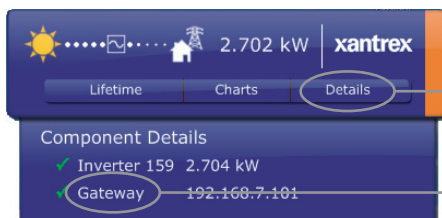

A. Click Details to view the device list.

B. Click Gateway to view the configuration web page.